

PERFORMANS DEĞERLERİ

			S1
10/45°C	90°C	Q(Kw)	291,1
		M(lt/h)	7129
	80°C	Q(Kw)	235,1
		M(lt/h)	5758
	70°C	Q(Kw)	182,7
		M(lt/h)	4475
10/60°C	90°C	Q(Kw)	263,5
		M(lt/h)	4518
	80°C	Q(Kw)	207,5
		M(lt/h)	3558
	70°C	Q(Kw)	155,1
		M(lt/h)	2660

NET LİTRE	2666 lt
BÜRÜT AĞIRLIK	 kg
NET AĞIRLIK	 kg
PALET	1500X1500X160 mm

Heat coil Maximum Operating Temperature 100°C

Heat coil Maximum Operating Pressure 8 bar

Domestic Hot Water Maximum Operating Temperature 95°C

Domestic Hot Water Maximum Operating Pressure 10 bar

ÜRÜN TEKNİK BİLGİ

TANIM	KOD	YÜKSEKLİK	INC
SOGUK SU GİRİŞ	B1	424 mm	2"
SERPANTİN GİRİŞ/ÇIKIŞ	B2 B5	520 mm 1416 mm	11/4"
RE SİRKÜLASYON	B4	868 mm	2"
SENSÖR	B3 B6	988 mm 1938 mm	1/2"
SICAK SU ÇIKIŞ	B7	2056 mm	2"
TEMİZLEME FLANŞI	B8	477 mm	4"
REZİSTANS GİRİŞİ	B9	1490 mm	2"
TERMOMETRE	B10	2055 mm	1/2"
MAGNEZYUM ANOT	B11	-----	11/4"
BOŞALTMA TAPASI	B12	-----	3"
ÜRÜN YÜKSEKLİĞİ	B13	2435 mm	-----
ÜRÜN ÇAPI	B14	1460 mm	-----


K-Q
TSE-ISO-EN
9001:2015
KALİTE YÖNETİM SİSTEMİ
BELGESİNE SAHİP
KURULUŞTA ÜRETİLMİŞTİR
EN ISO 9001:2015
QUALITY MANAGEMENT
SYSTEM CERTIFICATED



Made in TURKEY



ÜRÜN TEKNİK BİLGİ

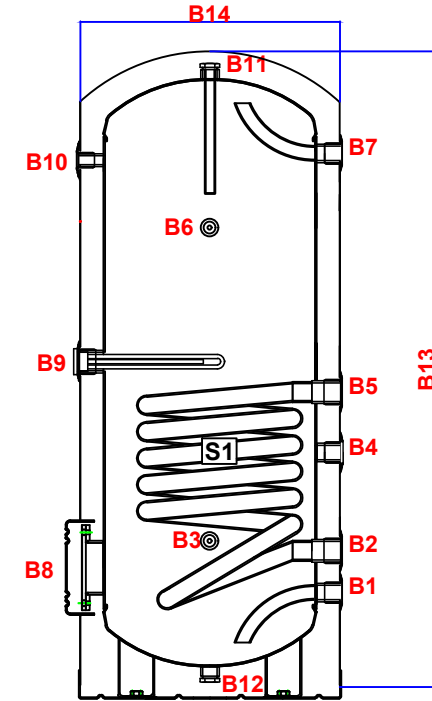

MATERIAL: DD11/ ST37 SHEET

THICKNESS

SHEET 5 MM

CAMBER 7 MM

ANODE DIN 4753-3 STANDART
magnesium anode Ø26 MM X 700 MM

COATING 1 80 MM FOAM FAUX LEATHER

Dimensions without tolerance
ISO 2768-m

3000 LT TEK SERPANTİN BOYLER
BMM DP 3000ELG SNG TSB

TSE - 736 STANDARTLARINA GÖRE
TASARLANMIŞTIR.

SERPANTİN GENEL BİLGİLERİ

	S1
NET BOYU	51,7 Metre
YÜZEY ALANI	6,87 m2
DIŞ ÇAPI	42 mm
ET KALINLIĞI	3 mm
SU HACMİ	52.6 lt