

PERFORMANS DEĞERLERİ

			S1
10/45°C	90°C	Q(Kw)	168,6
		M(lt/h)	4130
	80°C	Q(Kw)	136,2
		M(lt/h)	3336
	70°C	Q(Kw)	105,8
		M(lt/h)	2592
10/60°C	90°C	Q(Kw)	152,6
		M(lt/h)	2617
	80°C	Q(Kw)	120,2
		M(lt/h)	2061
	70°C	Q(Kw)	89,9
		M(lt/h)	1541

NET LİTRE	1414 lt
BÜRÜT AĞIRLIK	 kg
NET AĞIRLIK	 kg
PALET	1100X1100X140 mm

Heat coil Maximum Operating Temperature 100°C

Heat coil Maximum Operating Pressure 8 bar

Domestic Hot Water Maximum Operating Temperature 95°C

Domestic Hot Water Maximum Operating Pressure 10 bar

ÜRÜN TEKNİK BİLGİ

TANIM	KOD	YÜKSEKLİK	INC
SOGUK SU GİRİŞ	B1	372 mm	11/4"
SERPANTİN GİRİŞ/ÇIKIŞ	B2 B5	455 mm 885 mm	11/4"
RE SİRKÜLASYON	B4	1193 mm	11/4"
SENSÖR	B3 B6	850 mm 1871 mm	1/2"
SICAK SU ÇIKIŞ	B7	1893 mm	11/4"
TEMİZLEME FLANŞI	B8	403 mm	4"
REZİSTANS GİRİŞİ	B9	1275 mm	2"
TERMOMETRE	B10	1975 mm	1/2"
MAGNEZYUM ANOT	B11	-----	11/4"
BOŞALTMA TAPASI	B12	-----	11/4"
ÜRÜN YÜKSEKLİĞİ	B13	2245 mm	-----
ÜRÜN ÇAPI	B14	1120 mm	-----


K-Q
TSE-ISO-EN
9001:2015
KALİTE YÖNETİM SİSTEMİ
BELGESİNE SAHİP
KURULUŞTA ÜRETİLMİŞTİR
EN ISO 9001:2015
QUALITY MANAGEMENT
SYSTEM CERTIFICATED



Made in TURKEY



ÜRÜN TEKNİK BİLGİ

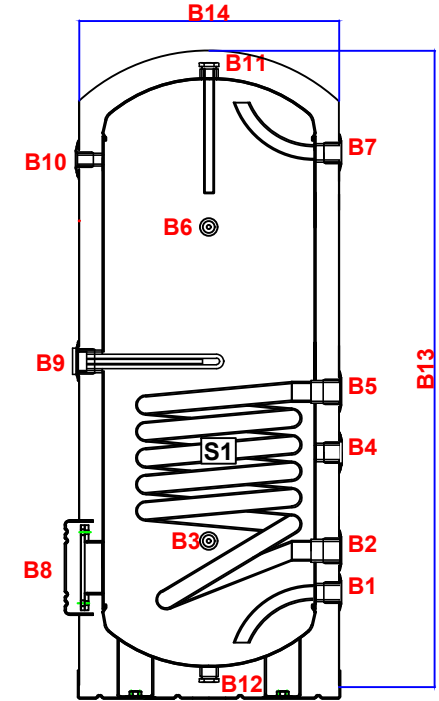

MATERIAL: DD11/ ST37 SHEET

THICKNESS

SHEET 4 MM

CAMBER 5 MM

ANODE DIN 4753-3 STANDART
magnesium anode Ø26 MM X 700 MM

COATING 1 80 MM FOAM FAUX LEATHER

Dimensions without tolerance
ISO 2768-m

1500 lt TEK SERPANTİN BOYLER
BMM DP 1500ELG SNG TSB

TSE - 736 STANDARTLARINA GÖRE
TASARLANMIŞTIR.

SERPANTİN GENEL BİLGİLERİ

	S1
NET BOYU	30 Metre
YÜZEY ALANI	3,98 m2
DIŞ ÇAPI	42 mm
ET KALINLIĞI	3 mm
SU HACMİ	30,5 lt