

PERFORMANS DEĞERLERİ

			S1
10/45°C	90°C	Q(Kw)	82,6
		M(It/h)	2023
	80°C	Q(Kw)	66,7
		M(It/h)	1634
	70°C	Q(Kw)	51,8
		M(It/h)	1270
10/60°C	90°C	Q(Kw)	74,8
		M(It/h)	1282
	80°C	Q(Kw)	58,9
		M(It/h)	1010
	70°C	Q(Kw)	44
		M(It/h)	755

NET LİTRE 549 lt

BÜRÜT AĞIRLIK kg

NET AĞIRLIK kg

PALET 770X770X120 mm

Heat coil Maximum Operating Temperature 100°C

Heat coil Maximum Operating Pressure 8 bar

Domestic Hot Water Maximum Operating Temperature 95°C

Domestic Hot Water Maximum Operating Pressure 10 bar

ÜRÜN TEKNİK BİLGİ

TANIM	KOD	YÜKSEKLİK	INC
SOGUK SU GİRİŞ	B1	266 mm	1"
SERPANTİN GİRİŞ/ÇIKIŞ	B2 B5	375 mm 935 mm	11/4"
RE SİRKÜLASYON	B4	740 mm	1"
SENSÖR	B3 B6	615 mm 1400 mm	1/2"
SICAK SU ÇIKIŞ	B7	1653 mm	1"
TEMİZLEME FLANŞI	B8	310 mm	4"
REZİSTANS GİRİŞİ	B9	1105 mm	2"
TERMOMETRE	B10	1678 mm	1/2"
MAGNEZYUM ANOT	B11	-----	1"
BOŞALTMA TAPASI	B12	-----	1"
ÜRÜN YÜKSEKLİĞİ	B13	1975 mm	-----
ÜRÜN ÇAPI	B14	740 mm	-----


K-Q
TSE-ISO-EN
9001:2015
KALİTE YÖNETİM SİSTEMİ
BELGESİNE SAHİP
KURULUŞTA ÜRETİLMİŞTİR
EN ISO 9001:2015
QUALITY MANAGEMENT
SYSTEM CERTIFICATED



Made in TURKEY



ÜRÜN TEKNİK BİLGİ

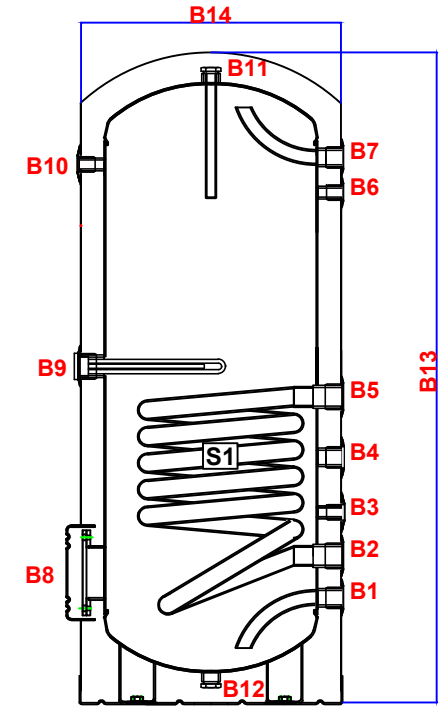

MATERIAL: DD11/ ST37 SHEET

THICKNESS

SHEET 3 MM

CAMBER 4 MM

ANODE DIN 4753-3 STANDART
magnesium anode Ø26 MM X 550 MM

COATING 1 50 MM FOAM FAUX LEATHER

Dimensions without tolerance
ISO 2768-m

600 lt TEK SERPANTİN BOYLER
BMM DP 600ELG SNG TSB

TSE - 736 STANDARTLARINA GÖRE
TASARLANMIŞTIR.

SERPANTİN GENEL BİLGİLERİ

	S1
NET BOYU	14,7 Metre
YÜZEY ALANI	1,95 m2
DIŞ ÇAPI	42 mm
ET KALINLIĞI	3 mm
SU HACMİ	14,96 lt