

PERFORMANS DEĞERLERİ

			S1
10/45°C	90°C	Q(Kw)	338,1
		M(lt/h)	8281
	80°C	Q(Kw)	273,1
		M(lt/h)	6688
	70°C	Q(Kw)	212,2
		M(lt/h)	5198,4
10/60°C	90°C	Q(Kw)	306,1
		M(lt/h)	5248
	80°C	Q(Kw)	241,1
		M(lt/h)	4133,5
	70°C	Q(Kw)	180,2
		M(lt/h)	3090

NET LİTRE	4675 lt
BÜRÜT AĞIRLIK	1008 kg
NET AĞIRLIK	 kg
PALET	1760X1760X160 mm

Heat coil Maximum Operating Temperature 100°C

Heat coil Maximum Operating Pressure 8 bar

Domestic Hot Water Maximum Operating Temperature 95°C

Domestic Hot Water Maximum Operating Pressure 10 bar

ÜRÜN TEKNİK BİLGİ

TANIM	KOD	YÜKSEKLİK	INC
SOGUK SU GİRİŞ	B1	618 mm	21/2"
SERPANTİN GİRİŞ/ÇIKIŞ	B2 B5	763 mm 1435 mm	11/4"
RE SİRKÜLASYON	B4	1208 mm	21/2"
SENSÖR	B3 B6	1154 mm 2155 mm	1/2"
SICAK SU ÇIKIŞ	B7	2205 mm	21/2"
TEMİZLEME FLANŞI	B8	628 mm	5"
REZİSTANS GİRİŞİ	B9	1584 mm	2"
TERMOMETRE	B10	2175 mm	1/2"
MAGNEZYUM ANOT	B11	-----	11/4"
BOŞALTMA TAPASI	B12	-----	3"
ÜRÜN YÜKSEKLİĞİ	B13	2780 mm	-----
ÜRÜN ÇAPI	B14	1760 mm	-----


K-Q
TSE-ISO-EN
9001:2015
KALİTE YÖNETİM SİSTEMİ
BELGESİNE SAHİP
KURULUŞTA ÜRETİLMİŞTİR
EN ISO 9001:2015
QUALITY MANAGEMENT
SYSTEM CERTIFICATED



Made in TURKEY



ÜRÜN TEKNİK BİLGİ

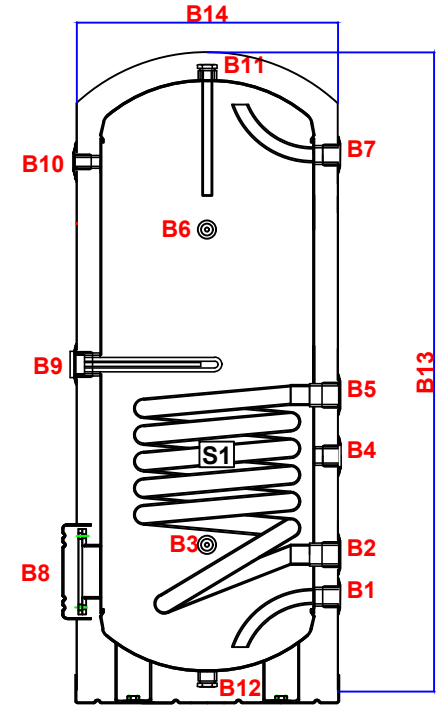

MATERIAL: DD11/ ST37 SHEET

THICKNESS	
SHEET	6 MM
CAMBER	8 MM
ANODE	DIN 4753-3 STANDART magnesium anode Ø26 MM X 700 MM
COATING 1	80 MM FOAM FAUX LEATHER

Dimensions without tolerance
ISO 2768-m

5000 LT TEK SERPANTİN BOYLER
BMM DP 5000ELG SNG TSB

TSE - 736 STANDARTLARINA GÖRE
TASARLANMIŞTIR.

SERPANTİN GENEL BİLGİLERİ

	S1
NET BOYU	60 Metre
YÜZEY ALANI	7,98 m2
DIŞ ÇAPI	36 mm
ET KALINLIĞI	3 mm
SU HACMİ	61 lt