

PERFORMANS DEĞERLERİ

			S1
10/45°C	90°C	Q(Kw)	309,3
		M(lt/h)	7575,2
	80°C	Q(Kw)	249,8
		M(lt/h)	6118
	70°C	Q(Kw)	194,1
		M(lt/h)	4755,4
10/60°C	90°C	Q(Kw)	280
		M(lt/h)	4800
	80°C	Q(Kw)	220,5
		M(lt/h)	3781
	70°C	Q(Kw)	164,9
		M(lt/h)	2827

NET LİTRE	3818 lt
BÜRÜT AĞIRLIK	 kg
NET AĞIRLIK	 kg
PALET	1660X1660X160 mm

Heat coil Maximum Operating Temperature 100°C

Heat coil Maximum Operating Pressure 8 bar

Domestic Hot Water Maximum Operating Temperature 95°C

Domestic Hot Water Maximum Operating Pressure 10 bar

ÜRÜN TEKNİK BİLGİ

TANIM	KOD	YÜKSEKLİK	INC
SOGUK SU GİRİŞ	B1	567 mm	21/2"
SERPANTİN GİRİŞ/ÇIKIŞ	B2 B5	678 mm 1462 mm	11/4"
RE SİRKÜLASYON	B4	1078 mm	21/2"
SENSÖR	B3 B6	1078 mm 2170 mm	1/2"
SICAK SU ÇIKIŞ	B7	2153 mm	21/2"
TEMİZLEME FLANŞI	B8	592 mm	5"
REZİSTANS GİRİŞİ	B9	1531 mm	2"
TERMOMETRE	B10	2170 mm	1/2"
MAGNEZYUM ANOT	B11	-----	11/4"
BOŞALTMA TAPASI	B12	-----	3"
ÜRÜN YÜKSEKLİĞİ	B13	2658 mm	-----
ÜRÜN ÇAPI	B14	1660 mm	-----


K-Q
TSE-ISO-EN
9001:2015
KALİTE YÖNETİM SİSTEMİ
BELGESİNE SAHİP
KURULUŞTA ÜRETİLMİŞTİR
EN ISO 9001:2015
QUALITY MANAGEMENT
SYSTEM CERTIFICATED



Made in TURKEY



ÜRÜN TEKNİK BİLGİ

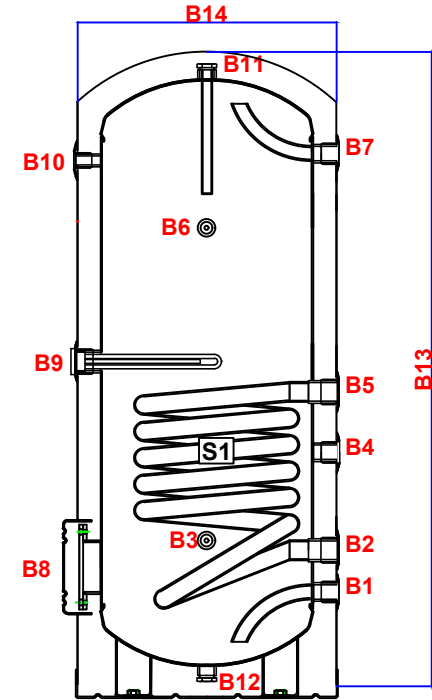

MATERIAL: DD11/ ST37 SHEET

THICKNESS

SHEET	6 MM
CAMBER	8 MM
ANODE	DIN 4753-3 STANDART magnesium anode Ø26 MM X 700 MM
COATING 1	80 MM FOAM FAUX LEATHER

Dimensions without tolerance
ISO 2768-m

4000 LT TEK SERPANTİN BOYLER
BMM DP 4000ELG SNG TSB

TSE - 736 STANDARTLARINA GÖRE
TASARLANMIŞTIR.

SERPANTİN GENEL BİLGİLERİ

	S1
NET BOYU	55 Metre
YÜZEY ALANI	7,3 m2
DIŞ ÇAPI	42 mm
ET KALINLIĞI	3 mm
SU HACMİ	56 lt